


Environment and Sustainable Development ACT Planning and Land Authority


## **Crace Precinct Code**

This page is intentionally blank.

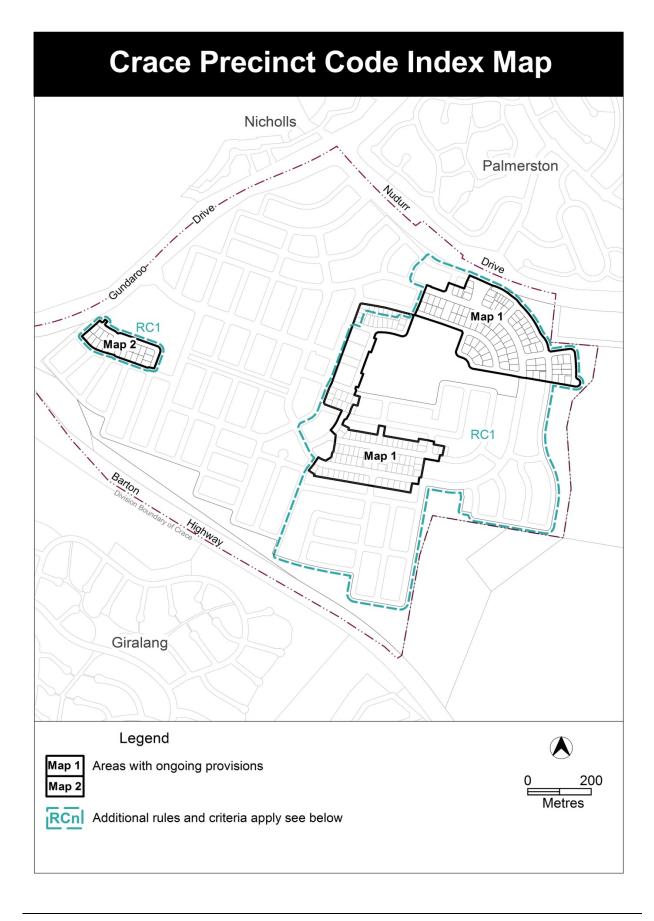


NI2008-27

10.1 Suburb Precinct Codes Crace Precinct Code Effective: 20 June 2012

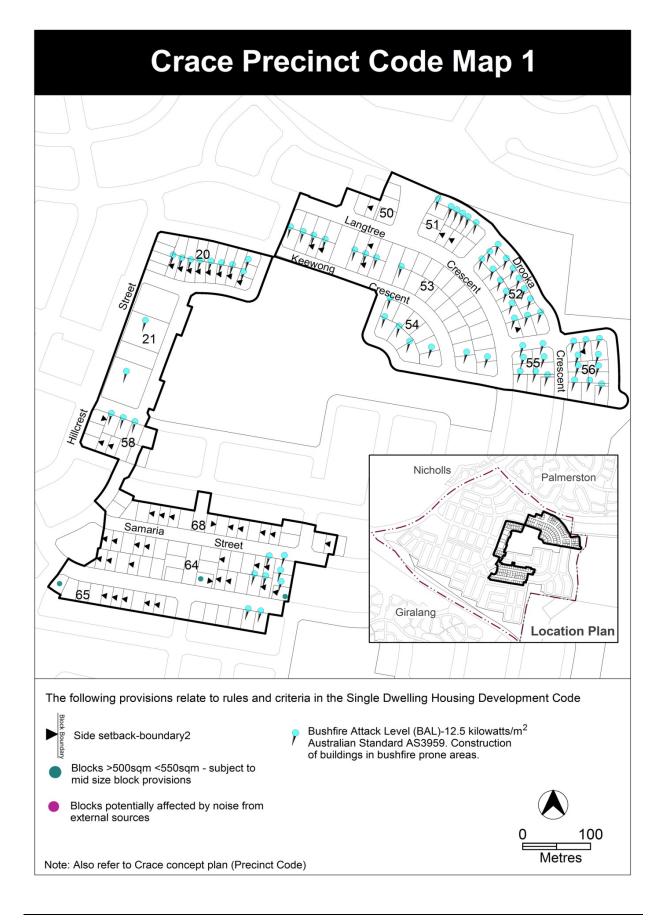

10.1 Suburb Precinct Codes Crace Precinct Code Effective: 20 June 2012

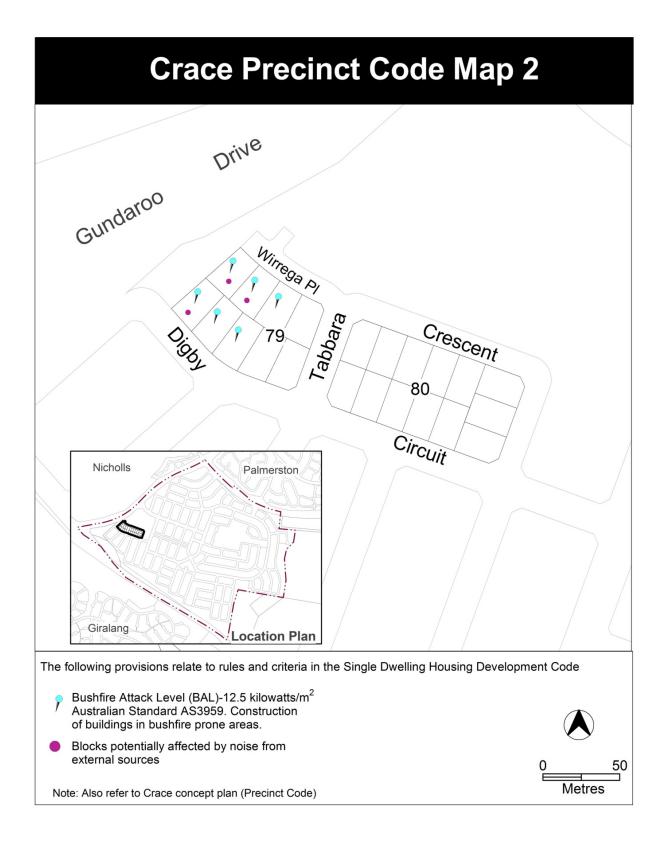

## Additional rules and criteria

The following rules and criteria apply to the areas identified in the Crace Precinct Code Index Map.

Rules	Criteria
1.1 Interface	
R1	
This rule applies to all boundary fencing corner blocks identified on the Crace ongoing block specific provisions map.	This is a mandatory requirement. There is no applicable criterion.
For a minimum of 9m from the corner of the primary and secondary frontages, any fencing forward of the building must comply with all of the following:	
a) is between 600mm and 900mm high	
b) is located on the boundary.	
Beyond 9m of the corner of the primary and secondary frontages, any fencing forward of the building line must comply with all of the following:	
<ul> <li>c) is located on or adjacent to the block's secondary frontage (except for north fronting blocks)</li> </ul>	
d) not less than 50% of the fencing is setback at least 600mm from the front boundary	
e) is not more than 1.5m high.	
Note. Figure 1 refers	
R2	
This rule applies to all boundary fencing blocks adjacent to open space identified on the Crace ongoing block specific provisions map.	This is a mandatory requirement. There is no applicable criterion.
For a minimum of 9m from the corner of the primary and secondary frontages, any fencing forward of the building must comply with all of the following:	
a) is a maximum of 1m high	
b) is located on the boundary.	
Beyond 9m of the corner of the primary and secondary frontages, any fencing forward of the building line must comply with all of the following:	
<ul> <li>c) is located on or adjacent to the block's secondary frontage</li> </ul>	

Rules	Criteria
d) not less than 50% of the fencing is set back at least 600mm from the front boundary	
e) is not more than 1.5m high.	
Note: Figure 1 refers.	
R3	
This rule applies to all boundary fencing north facing blocks identified on the Crace ongoing block specific provisions map.	This is a mandatory requirement. There is no applicable criterion.
Any fencing forward of the building line must comply with all of the following:	
a) not less than 50% of the fencing is set back at least 600mm from the front boundary	
b) is adjacent to the block's <i>principal private</i> open space	
c) is not more than 1.5m high.	
Note: Figure 2 refers.	
R4	C4
This rule applies to all boundary fencing blocks shown as shaded blocks identified on the Crace ongoing block specific provisions map.	Boundary fencing forward of the building line is partially transparent and is constructed of quality materials that complement those used in the
Any fencing forward of the building line complies with all of the following:	dwelling
<ul> <li>a) is constructed of masonry or stone work and includes infill panels of timber slats (excluding raw treated pine or palings) or metal slats (excluding metal cladding or swimming pool fencing) and contains planting to minimum 50% of the solid masonry walls.</li> </ul>	

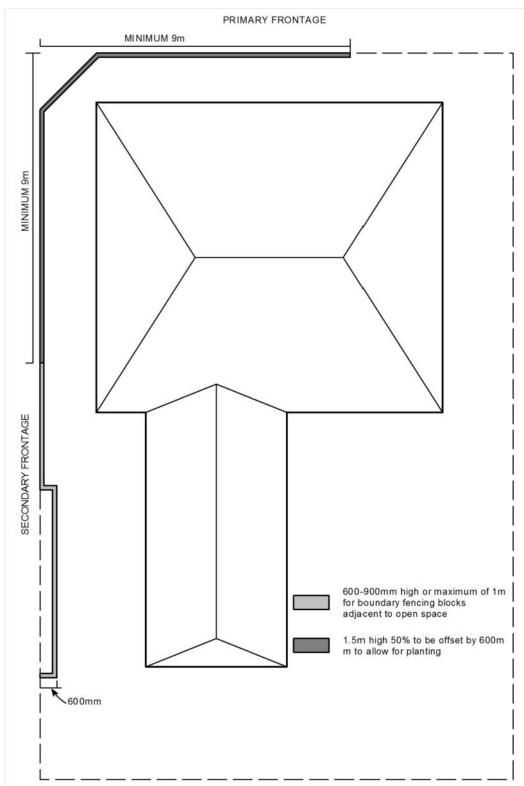


Figure 1 Fence location for corner blocks and blocks adjacent to open space

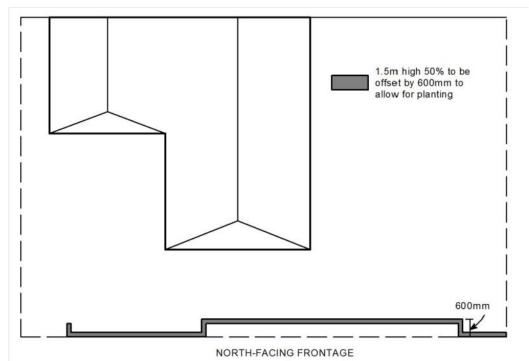


Figure 2 Fence location for north facing blocks



Figure 3 Fencing plan 1

